



Isothermal container to transport and serve liquids, with 10 litre capacity

- Indicated for distribution of beverages (tea, coffee, milk, fruit juice, etc.) during breakfast, receptions, banqueting. The isothermal characteristics comply with current regulations (EC Reg. 852/2004 – HACCP-) and with applicable technical standards (EN 12571 and Accord AFNOR AC D40-007).
- Tap with rapid and precise dispenser.
- The container is light and easily stackable.
- Fitted with four support feet, to provide the container with excellent stability during transport..
- Thanks to its excellent isothermal characteristics, it keeps liquids at an optimum storage temperature for a long time.
- It assures proper temperature retention, limiting the risk of bacterial proliferation whilst preserving food quality and organoleptic characteristics.
- Designed to be long lasting: performance remains basically unaltered when reused.
- Fully recyclable at the end of the operating life.
- Produced with rotational moulding technology: the container and the lid have a monolithic structure (no sharp corners, junctions and welds).

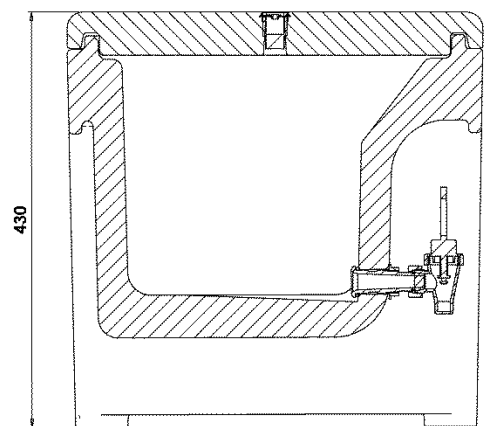
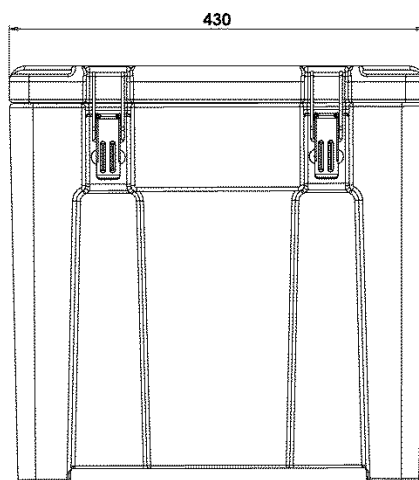
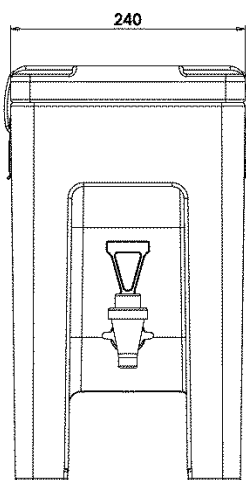
MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and of the lid; food contact safe	Polyurethane	insulating material between the walls of the container and of the lid free of CFC and HCFC
Silicone rubber	gasket	Polyamide and Polypropylene	tap
Stainless steel	latches		

CHARACTERISTICS












	<p>Space under the tap suitable to fill easily cups or bowls with maximum dimensions dia. 110 mm; height 110 mm.</p>		<p>Available on request the long shank version, to allow the filling of bowls with diameter greater than 110mm</p>
	<p>The tap can be replaced with a blanking plug, useful during transport of liquid foods (broths, soups, etc.).</p>		<p>Wide top opening to ease filling operations.</p>
	<p>Melform closures in stainless steel.</p>		<p>Equipped with adjustable relief valve.</p>
	<p>Monolithic structure, no sharp corners, junctions and welds.</p>		<p>Easily removable lid gasket</p>
	<p>Insulated with CFC and HCFC-free polyurethane foam.</p>	<p>°C</p>	<p>Container guaranteed for use: -30° to +85°C.</p>

TECHNICAL SPECIFICATIONS



Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
QC10	QC100011	grey/blue mel	240x430xh430		10	6.2
	QC100001	blue				
	QC100007	red				
	QC100003	sand				

SPARE PARTS

			
RRI021 Gaskets kit 5 pieces per package	RRI130 Stainless steel interlocking kit 4 pieces per package	RRI031 Vent valves kit 10 pieces per package	RRI018 Blanking plugs kit 1 piece per package
			
RRI011 Complete tap kit 1 piece per package	RRI162 Shank kit (including nut and gasket) 5 pieces per package	RRI012 Tap gaskets kit 5 pieces of each gasket per package	RRI015 Butterfly screws kit 5 pieces per package
			
RRI016 Seeger kit 5 pieces per package	RRI063 Gasket kit 5 pieces per package	RRI175 Tap kit with long shank 1 piece per package	